



KEGEL LANDMARK PATTERNS

CHALLENGE SERIES



C - Taj Mahal




Oil Pattern Distance	38	Reverse Brush Drop	32	Oil Per Board	40 ul
Forward Oil Total	14.96 mL	Reverse Oil Total	9.6 mL	Volume Oil Total	24.56 mL
Tank Configuration	N/A	Tank A Conditioner	FIRE	Tank B Conditioner	ICE


	START	STOP	LOADS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	3	14	3	B	111	0.0	3.9	3.9	4440
2	4L	4R	1	14	3	B	33	3.9	5.8	1.9	1320
3	6L	6R	2	14	3	B	58	5.8	9.7	3.9	2320
4	8L	7R	2	14	3	B	52	9.7	13.6	3.9	2080
5	9L	8R	1	14	3	B	24	13.6	15.5	1.9	960
6	10L	9R	1	14	3	B	22	15.5	17.4	1.9	880
7	11L	10R	2	18	3	B	40	17.4	22.5	5.1	1600
8	12L	11R	1	18	3	B	18	22.5	25.0	2.5	720
9	13L	12R	1	18	3	B	16	25.0	27.5	2.5	640
10	2L	2R	0	18	3	B	0	27.5	30.0	2.5	0
11	2L	2R	0	22	3	B	0	30.0	38.0	8.0	0

	START	STOP	LOADS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	30	3	B	0	38.0	32.0	-6.0	0
2	12L	10R	1	22	3	B	19	32.0	28.9	-3.1	760
3	10L	9R	1	22	3	B	22	28.9	25.8	-3.1	880
4	9L	8R	2	22	3	B	48	25.8	19.6	-6.2	1920
5	7L	7R	2	22	3	B	54	19.6	13.4	-6.2	2160
6	6L	6R	1	14	4	B	29	13.4	11.5	-1.9	1160
7	5L	5R	1	14	4	B	31	11.5	9.6	-1.9	1240
8	2L	2R	1	14	4	B	37	9.6	7.7	-1.9	1480
9	2L	2R	0	14	4	B	0	7.7	0.0	-7.7	0

Cleaner Ratio Main Mix 4:1
 Cleaner Ratio Back End Mix 4:1
 Cleaner Ratio Back End Distance 59
 Buffer RPM: 4 = 700 | 3 = 500 | 2 = 200 | 1 = 60

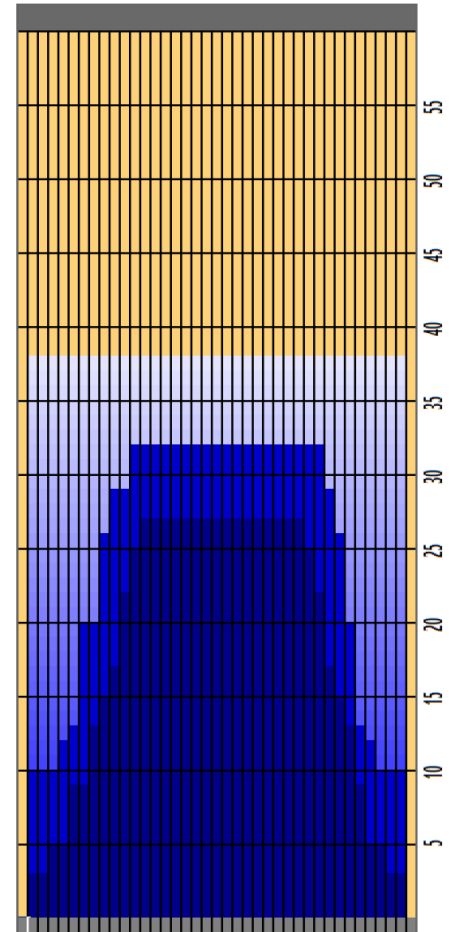

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside Track:Middle	Middle Track:Middle	Inside Track:Middle	Middle: Inside Track	Middle:Middle Track	Middle:Outside Track
Track Zone Ratio	3.29	1.29	1	1	1.15	3.11

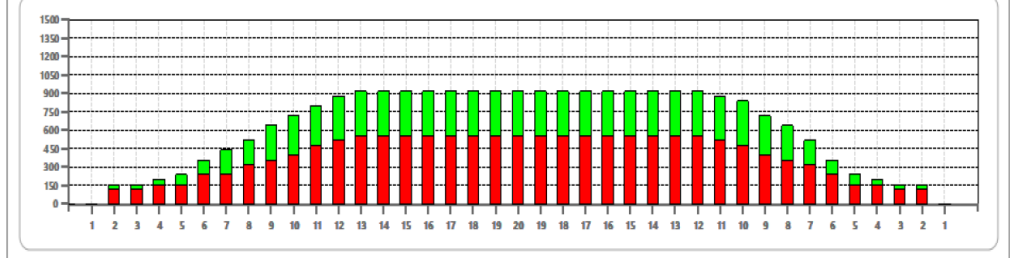

This page shows the **KOSI FLEX LANE MACHINE** program sheet.

The **HEADER** shows the oil pattern distance, the reverse brush drop distance, the amount of lane conditioner applied to the lane, the oil per board setting, and the conditioner type in each tank.

Below that is the **FLEX LANE MACHINE PROGRAM** settings which shows the load structure and number of loads, the oil pump setting if using the multi mic stream feature, the speed of the lane machine, the buffer speed, and the tank choice per load screen.

The **OVERHEAD CHART** on the far right shows where the conditioner is applied on both the forward and reverse pass. The gradient area is a calculation of how the conditioner might bleed off the buffer brush.

The **COMPOSITE GRAPH** at the bottom shows the total amount of conditioner applied to every board along with that volume ratio in different zones.

A good way to think about the composite graph is to envision all the conditioner on the lane being pushed back to the foul line. Once all the conditioner is stacked up, this is what it would look like.

KEGEL TIP - Once the amount of conditioner on the corners (outsides) reaches 300 microliters, an oil pattern begins to become "competitive". Less than that amount the ball might see friction and it could play on the easy side.